




# BlueStorm/SP RJ-11

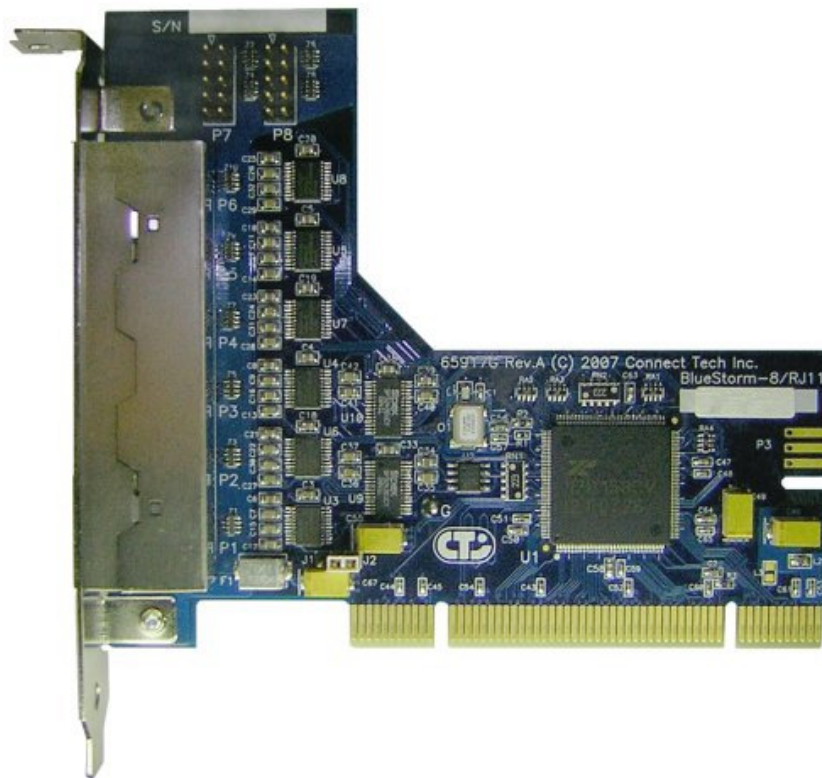

## Features

- 32-bit Universal PCI
- Six RJ-11 connectors provide +12 VDC or +5 VDC output - jumper selectable
- Eight RS-232 ports (six RJ-11, two on-board headers)
- Supports full duplex with RTS/CTS flow control (on-board header only)
- Bi-directional data speeds up to 921.6 Kbps
- Multi-strike surge suppression on every signal of every port
- Operating temperature range of 0°C to 70°C
- Built for installation in a standard height chassis
- RoHS compliant



## Technical Specifications

<b>Number of Ports</b>	8 ports
<b>Electrical Interface</b>	RS-232
<b>Connectors</b>	Six RJ-11 connectors accessible through the factory installed bracket, two on-board 10 pin headers
<b>Control Signals</b>	RJ-11: TxD, RxD, RTS, DSR, SG (Signal Ground), DC Power 10 pin header: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, SG (Signal Ground)
<b>Baud Rate</b>	RS-232: 50 bps to 921.6 Kbps
<b>Interrupts</b>	Assigned by Plug and Play resources
<b>Memory Addresses</b>	Assigned by Plug and Play resources
<b>UART Type</b>	Eight UART channels with 64 byte transmit and receive FIFO FIFO buffers for each port - programmable trigger levels
<b>Dimensions</b>	Length: 12.129 cm/4.775" Height: 10.668 cm/4.2"
<b>Environmental</b>	Operating Temperature: 0° C to 70° C (32° F to 158° F) Storage Temperature: -55° C to 105° C (-67° F to 221° F) Humidity: 5 to 95% non-condensing
<b>Bus</b>	32-bit Universal PCI
<b>Software Compatibility</b>	Windows 2000/CE/XP/XP x64/XPe/Server 2003/ Server 2003 x64/Vista, QNX 4.X/6.X and Linux
<b>Surge Supression</b>	Transient voltage suppression on every signal of every port - energy dissipation 0.05 joules, peak current 15A
<b>System Requirements</b>	+5V (required to power board and RJ-11) +12V (required to support RJ-11 DC power)
<b>Regulatory Approvals</b>	FCC Class A ICES -003 Class A

BlueStorm/SP RJ-11 offers hardware flexibility and adaptability for your mission critical applications.

The BlueStorm/SP RJ-11 is an extension of the BlueStorm product family and available as a standard profile card only.

BlueStorm/SP RJ-11 offers eight ports of RS-232 serial connectivity. Each port can be configured independantly for baud rate, parity, data and stop bits. Eliminate the need for external power supplies with +5 VDC or +12 VDC of power provided on six RJ-11 ports for applications where peripherals may require it (up to 300mA total).

Two DB-9 connectors are also accessible via an optional cable assembly.

BlueStorm/SP RJ-11 is compatible with 3.3V and 5V PCI slots.

Bi-directional data speeds up to 921.6 Kbps ensure fast data aquisition and communications. All BlueStorm/SP RJ-11 products are FCC certified and CE marked.

All brand names, trade marks and registered trade marks are property of their respective owners.