

# EP2C602




## Standard Enterprise Server Solution



2011

### Application

- Enterprise Server
- High Performance Storage Server (14 SATA)
- Web Server

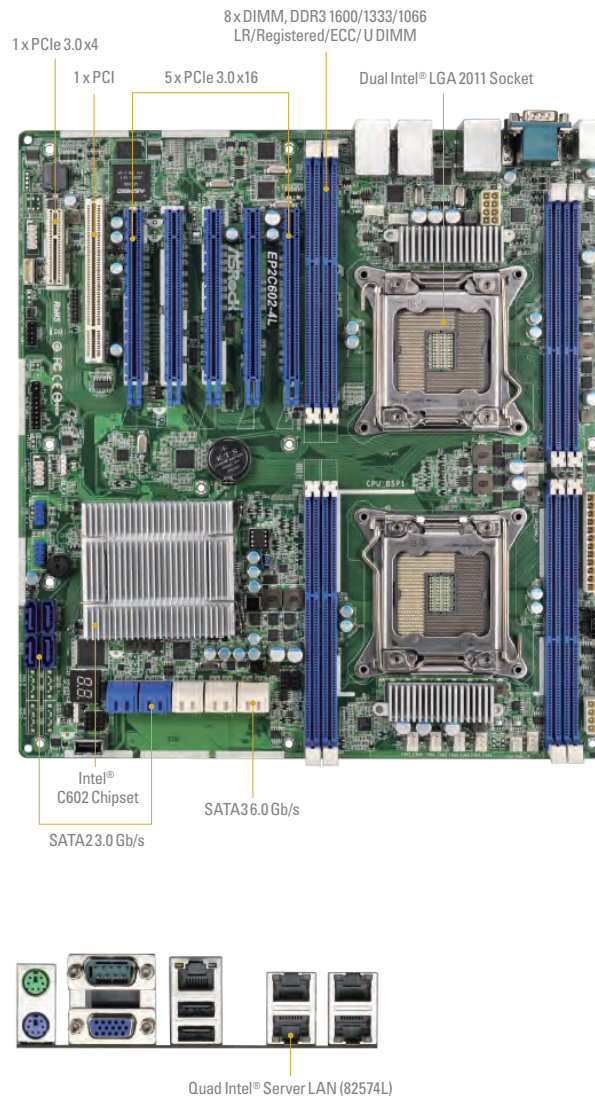

		EP2C602
<b>Form Factor</b>		SSI EEB(12"x13")
<b>Processor Support</b>		Dual Socket LGA 2011 Support Intel® Xeon® E5-1600/2600/4600 v1, v2 Series
<b>Chipset</b>		Intel® C602
<b>Memory</b>		Quad Channel, 8 DIMM DDR3 1866/1600/1333/1066 U DIMM, ECC DIMM, R DIMM, LR DIMM
<b>Storage</b>	Intel PCH	Intel® C602: 2 x SATA3 6.0 Gb/s, 8 x SATA2 3.0 Gb/s (support RAID 0, 1, 5, 10)
	Additional	Marvell 9230 : 4 x SATA3 6.0 Gb/s
<b>Expansion Slots</b>		5 x PCIe 3.0 x16, 1 x PCIe 3.0 x4, 1 x PCI
<b>Ethernet</b>	LAN Controller	2 x Intel® 82574L
	LAN Port	RJ45: 2 + 1 (for IPMI 2.0)
<b>System management</b>	BMC Controller	ASPEED AST2300
	IPMI dedicated LAN	Realtek RTL8211E