MEC-DIS-M002

Mini PCI-e DVI/VGA output graphic board



- PCI Express x 1 compliant
- Support simultaneously dual display output
- Industry- Leading 2D acceleration graphic engine
- On board video memory with 16MB DDR SDRAM
- Support 1280 x 1024 @ 60Hz DVI /VGA resolution



















Overview

MEC-DIS-M002 is a graphic card for embedded PC. The card follows the Mini PCI-e standard which is complaint with PCI Express x 1 classification and small form factor (30.00 x 50.95 mm). This board fits in any host computer that has Mini PCI-e card slots.



Display Performance

MEC-DIS-M002 supports simultaneous dual display outputs, which are VGA and DVI outputs. The 2D acceleration graphic engine and embedded DDR memory efficiently reduce CPU loading and produce outstanding graphics performance.



High Usability


MEC-DIS-M002 is tested to be compatible with various Windows Operation Systems. The daughter board with bracket (1 DVI-I connector) and connection cable are included in the standard package.



MECFIX - Versatile Mounting

MECFIX is the unique mounting mechanism designed specially for MEC daughterboard. The feature of the mounting unit allows the following mounting options:

- 1. Standard PCI/PCIe Bracket
- 2. Low Profile PCI/PCIe Bracket
- 3. **Internal Mounting** inside of PC system from any position and angle.
- 4. Customizing Front/Rear Plate of PC system according to dimension of MEC daughterboard.

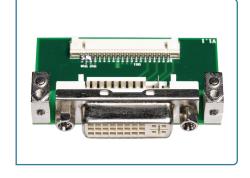

Specifications

Hardware

Controllers: SiliconMotion SM750 with 16MB

DDR SDRAM

Bus: PCI Express X1

Interface (Connector)

DVI: 1 (DVI-I)

Performance

DVI Resolution: Up to 1280 x 1024, 60Hz **VGA Resolution:** Up to 1280 x 1024, 60Hz

Driver Support


Operating Systems: Win 2003, Win XP,

Win Vista, Win 7, Win 8

Power Requirement

Power Consumption: 740mA@3.3V

Dimensions

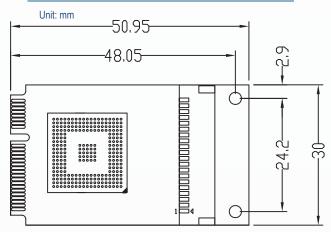

Package Checklist

- Mini PCI-e Card x 1
- Daughter Board (DVI-I connector) x 1
- Bracket x 1
- M2.5 Screw x 2
- 20Pin Internal Connection Cable (30cm) x 1
- Quick Installation Guide (Printed) x 1
- Driver CD x 1

Dimensions

Width x Length (mm): 30.00 x 50.95

Environmental Limits

Operating Temperature: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$ Storage Temperature: $-20^{\circ}\text{C} \sim 85^{\circ}\text{C}$

Humidity: 5% ~ 95%

Regulatory Approvals

EMC: CE, FCC

EMI: EN 55022, EN61000-3-2, EN61000-3-3,

FCC Part 15 Subpart B


Class B

EMS: En 55024, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6,

IEC 61000-4-8, IEC 61000-4-11

Reliability

MTBF: 1,425,435 hr Warranty: 3 years

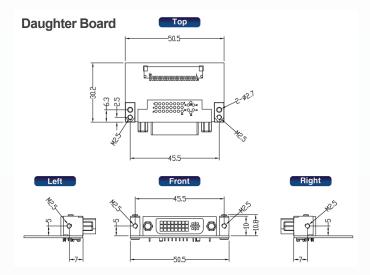



Ordering Information



Available Models

MEC-DIS-M002 Mini PCI-e DVI/VGA output graphic board MCB-DVIDVGA-30 DVI-I to 1x DVI-D and 1x VGA cable, 30cm (Optional)

