

# 1U2FH-4L




High-Density and High Performance Cloud Computing Nodes for HPC, Telecom and Internet Security



2 Full-Height Card Supported in 1U



1U/2U High Density Storage

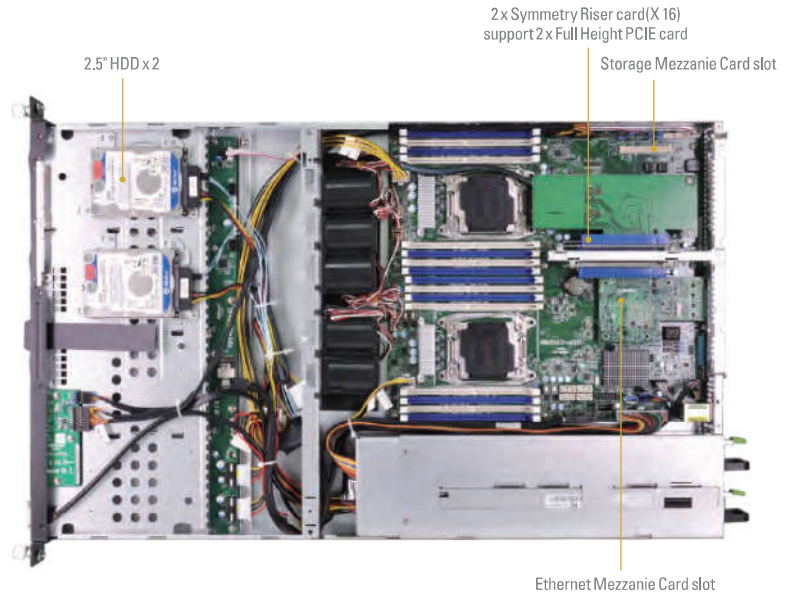

## 1U2FH-4L



<b>System Physical Status</b>	Form Factor	1U Rackmount
	Chassis Dimension	710 mm x 430 mm x 43.5 mm (28x 16.9 x 1.5")
	Support MB Size	EEB, 12"x13" (FH-C612NM)
<b>Front Panel</b>	Buttons	Power On/Standby button, System reset button
	LEDs	Power LED, Hard drive activity LED, Network activity LEDs
	I/O Ports	2 x USB 3.0 Ports
<b>Storage</b>	External	4 x 3.5" SATA HDDs (6GB/s) Hot Swap Bay
	Internal	2 x 2.5" SATA HDDs (6GB/s)
<b>System Cooling</b>	Fan	6 x 40*56 system fans
<b>Power Supply</b>	Capacity	1U(1+1) Redundant
	Output Watts	650W
	Efficiency	Platinum
<b>HDD Backplane</b>	Expander	N/A
	Connection to MB	2x mini-SAS 8087 & 4-port SATA3

\*Compatible Motherboard: FH-C612NM