



2U12L6SW-2TS6

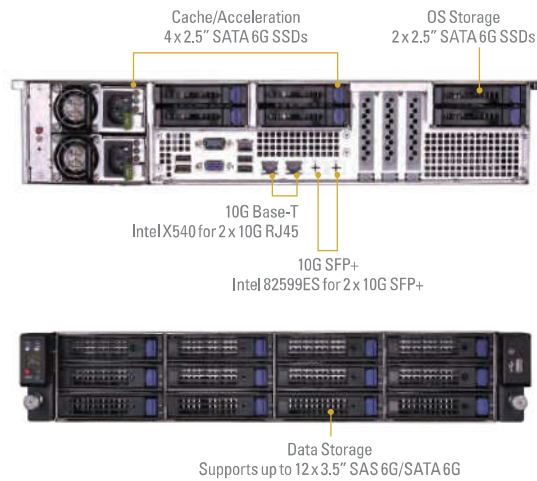

Hybrid Storage
SAS + SSD Best Platform
for Datacenter, Database,
Big Data Server and VM.

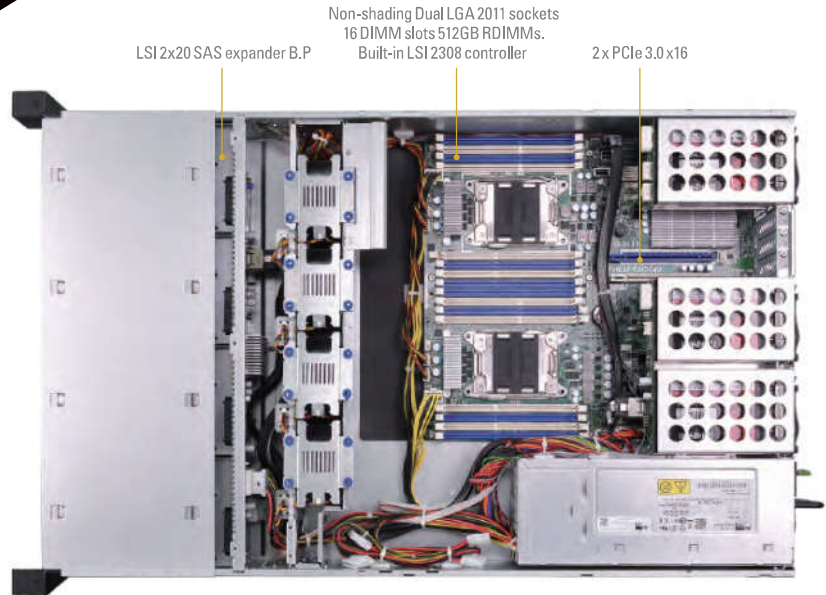

2U12L6SW-2TS6

System Physical Status	Form Factor	2U Rackmount
	Chassis Dimension	26" x 16.9" x 3.5" (660 x 430 x 88 mm)
	Support MB Size	EEB, 12"x13" (EP2C602-2TS6/D16)
Front Panel	Buttons	Power On/Standby button, ID button, System reset button, NMI button
	LEDs	Power LED, Identification LED, Hard drive activity LED, 4x Network activity LEDs, System event LED
	I/O Ports	1 x USB 2.0 Ports
Storage	Front side	12 x 3.5" SATA HDDs (6GB/s)
	Rear side	6 x 2.5" SATA HDDs (6GB/s)
System Cooling	Fan	4 x 80*38 mm system fans
Power Supply	Capacity	2U (1+1) Redundant
	Output Watts	650W
	Efficiency	Gold
Front HDD Backplane	Expander	LSI 2x20
	Connection to MB	3 x mini-SAS 8087 (for 12 x 3.5" SAS2/SATA3)
Rear HDD Backplane	Expander	NA
	Connection to MB	1 x mini-SAS 8087 & 2-port SATA3 (for 6 x 2.5" SAS2/SATA3)

*Compatible Motherboard: EP2C602-2T20S6/D16, EP2C602-2TS6/D16, EP2C602-2L+20S6/D16, EP2C602-2L+0S6/D16, EP2C602-S6/D16