

IVH-9008-PoER

Quad Core 6th Generation Intel® Xeon®/ Core™ i7/ i5/ i3 (Skylake-H) In-Vehicle Fanless Embedded System with Intel® CM236, 10 Gigabit LAN with 8 PoE+, 4 Front-access SSD Tray, Isolated DIO, High Performance, Rugged, Extended Temperature



Features

- Quad Core 6th Generation Intel® Xeon®/ Core™ i7/ i5/ i3 Processor (Skylake-H) with CM236 Chipset supports up to 3 independent 4K displays
- Fanless, -25°C to 70°C Operating Temperature
- 10 Gigabit LAN with 8 IEEE 802.3at PoE+ compliant
- 4 Mini PCIe, 4 SIM Card Socket (3 External)
- 4 Front-access 2.5" SSD, 5 External USB
- Supports 3G/ 4G/ LTE/ WiFi/ GPRS/ UMTS
- 16 Isolated DIO, 16 GPIO
- Configurable Ignition Power Control
- 6V to 78V DC-in, 200V Surge Protection
- UPS Supported (Optional)




Specifications

System	
Processor	Intel® Xeon® E3-1505M v5/ Core™ i7-6820EQ/ i5-6440EQ Processor (Skylake-H)
Chipset	Intel® CM236
BIOS	AMI
SIO	IT8786E
Memory	2 DDR4 2133MHz SO-DIMM, up to 32GB
I/O Interface	
Serial	4 COM RS-232/ 422/ 485
USB	<ul style="list-style-type: none"> ▪ 4 USB 3.0 (External) ▪ 1 USB 2.0 (Internal)
Isolated DIO	16 Isolated DIO : 8 DI, 8 DO
GPIO	16 GPIO
LED	Power, HDD, Wireless, PoE
SIM Card	4 SIM Card Socket (3 External, 1 Internal)
Expansion	
Mini PCIe	<ul style="list-style-type: none"> ▪ 1 Mini PCIe Socket for PCIe/ USB/ Internal SIM Card/ Optional mSATA ▪ 3 Mini PCIe Socket for PCIe/ USB/ External SIM Card
SUMIT A, B	2 SUMIT Slot (Optional)
Graphics	
Graphics Processor	Intel® HD Graphics P530/ 530
Display Memory	Shared Memory, up to 1.7GB
Interface	<ul style="list-style-type: none"> ▪ DVI-D : Up to 1920 x 1200 @ 60Hz ▪ DisplayPort 1 : Up to 4096 x 2304 @ 60Hz ▪ DisplayPort 2 : Up to 4096 x 2304 @ 60Hz
Storage	
SATA	6 SATA III (6Gbps)
mSATA	1 SATA III (Mini PCIe Type, 6Gbps)
Storage Device	<ul style="list-style-type: none"> ▪ 1 CFast Socket, Push-in/ Push-out Ejector ▪ 4 Front-access 2.5" SSD/ HDD Tray
Audio	
Audio Codec	Realtek ALC892, 5.1 Channel HD Audio
Audio Interface	1 Mic-in, 1 Line-out
Ethernet	
LAN 1	Intel® I219 Gigabit LAN supports iAMT
LAN 2	Intel® I210 Gigabit LAN
PoE	
LAN 3 to 10	Gigabit IEEE 802.3at (25.5W/48V) PoE+ by Intel® I350


Power	
Power Input	6V to 78V, DC-in
Power Interface	3-pin Terminal Block : V+, V-, Frame Ground
Ignition Control	16 Mode
Remote Switch	5-pin Terminal Block : On, Off, IGN, LED+, LED-
Surge Protection	Up to 200V/1ms Transient Power
UPS	Supported (Optional)
Others	
TPM	Optional Infineon SLB9665 supports TPM 2.0, LPC Interface
Watchdog Timer	Reset : 1 to 255 sec./min. per step
Smart Management	Wake on LAN, PXE supported
HW Monitor	Monitoring temperature, voltages. Auto throttling control when CPU overheats.
GPS	Onboard GPS Module (Optional)
Software Support	
OS	Windows 10, Windows 8, Windows 7, Linux
Mechanical	
Dimensions (W x L x H)	260mm x 215mm x 79mm (10.2" x 8.5" x 3.1")
Weight	4.2 kg (9.26 lb)
Mounting	<ul style="list-style-type: none"> ▪ Wallmount by mounting bracket ▪ 2U Rackmount (Optional)
Environment	
Operating Temperature	-25°C to 70°C (-13°F to 158°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Humidity	5% to 95% Humidity, non-condensing
Relative Humidity	95% @ 70°C
Shock	<ul style="list-style-type: none"> ▪ IEC 60068-2-27 ▪ SSD : 50G @ wallmount, Half-sine, 11ms
Vibration	<ul style="list-style-type: none"> ▪ IEC 60068-2-64 ▪ SSD : 5Grms, 5Hz to 500Hz, 3 Axis
EMC	CE, FCC, EN 50155, EN 50121-3-2

Dimensions


Unit : mm/ inch

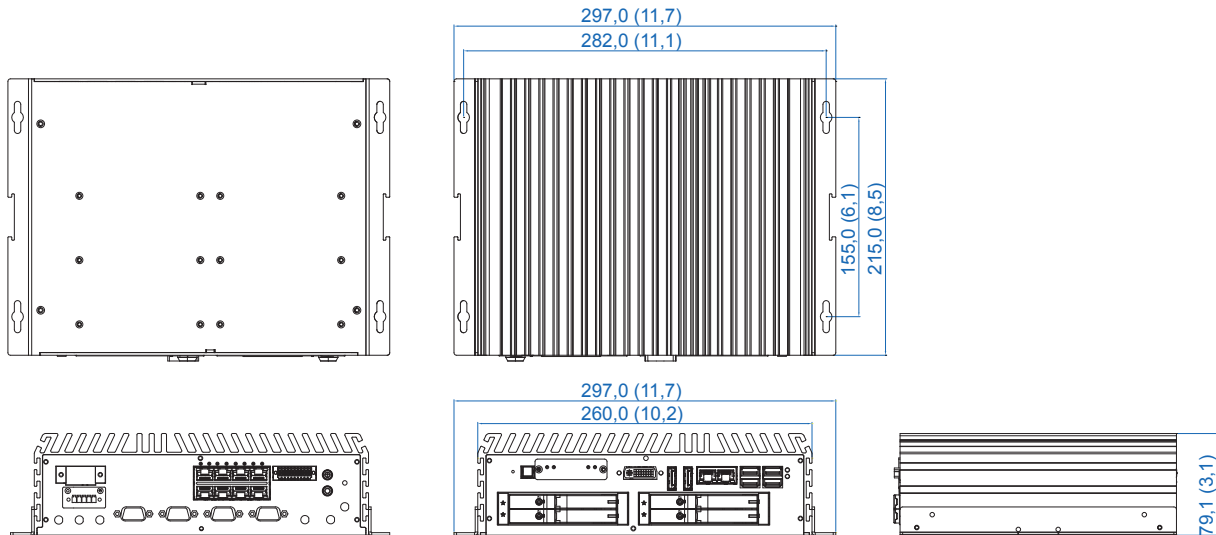

Front I/O

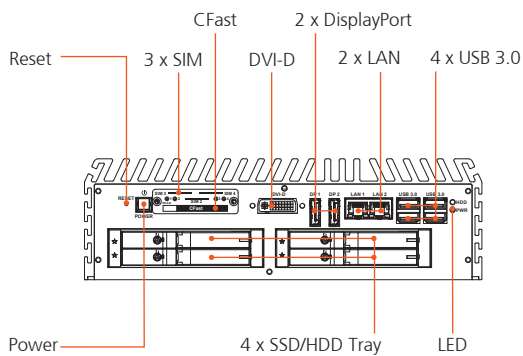

Rear I/O

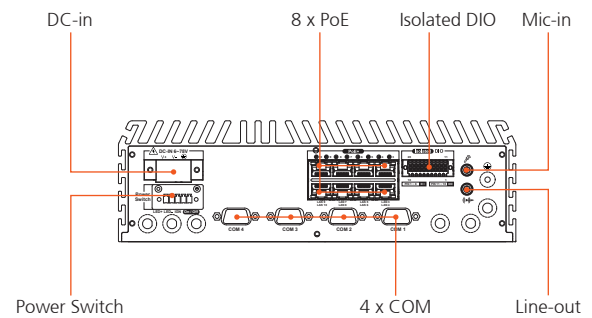

Order Information

IVH-9008-PoER505M	IVH-9000, Quad Core Intel® Xeon® E3-1505M v5 In-Vehicle Fanless Embedded System, 10 GbE LAN with 8 PoE [†] , 4 Front-access SSD Tray, 4 COM, 4 USB 3.0, 4 SIM, Isolated DIO, 16 GPIO
IVH-9008-PoER820Q	IVH-9000, Quad Core Intel® Core™ i7-6820EQ In-Vehicle Fanless Embedded System, 10 GbE LAN with 8 PoE [†] , 4 Front-access SSD Tray, 4 COM, 4 USB 3.0, 4 SIM, Isolated DIO, 16 GPIO
IVH-9008-PoER440Q	IVH-9000, Quad Core Intel® Core™ i5-6440EQ In-Vehicle Fanless Embedded System, 10 GbE LAN with 8 PoE [†] , 4 Front-access SSD Tray, 4 COM, 4 USB 3.0, 4 SIM, Isolated DIO, 16 GPIO
DDR4 16G	Certified DDR4 16GB 2133MHz RAM
DDR4 8G	Certified DDR4 8GB 2133MHz RAM
DDR4 4G	Certified DDR4 4GB 2133MHz RAM
PWA-280W-WT	280W, 24V, 85V AC to 264V AC Power Adaptor with 3-pin Terminal Block, Wide Temperature -30°C to +70°C
VESA Mount	VESA Mounting Kit
DIN-RAIL	DIN Rail Kit
Rack Mount	2U Rackmount Kit
TMBK-20P-100	Terminal Block 20-pin to SCSI Cable, 100cm Terminal Block 20-pin to SCSI Cable, 100cm
TMBK-20P-500	Terminal Block 20-pin to SCSI Cable, 500cm Terminal Block 20-pin to SCSI Cable, 500cm
TMB-SCSI-20P	Terminal Board with One 20-pin SCSI Connector and DIN-Rail Mounting Terminal Board with One 20-pin SCSI Connector and DIN-Rail Mounting
3G Module	Mini PCIe 3G/GPS Module with Antenna
4G Module	Mini PCIe 4G/GPS Module with Antenna
WiFi & Bluetooth Module	Intel® Mini PCIe WiFi & Bluetooth Module with Antenna

1

High Performance Embedded System

2

Expandable Embedded System

3

Ultra Compact Embedded System

4

Multi-Touch Computer/ Display

5

Frame Grabber