



2U4N-F/C622

2U4N-F/C621-M3



3647




Half-width



1U/2U High Density Computes

High Performance and High-density Computing Nodes for HPC, Cloud Computing, Internet Security and Science

Support up to 2.5" SATA3 HDD up to 6Gb/s

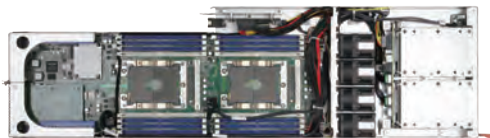

EP2C612D16HM



2x 1200W PSU (1+1 Redundant)

2U4N-F/C622



2U4N-F/C621-M3



System Physical Status	Form Factor	2U Rackmount	2U Rackmount
	Chassis Dimension	750mm X 448mm X 86mm	778mm X 448mm X 86mm
	Support MB Size	EP2C622D16HM-C (Half, 20"x6.5")	EP2C621D16HM2-M3(Half, 20"x6.5")
Front Panel	Buttons	Power On Button, System Reset Button, UID(rear)	Power On Button, System Reset Button, UID(rear)
	LEDs	POWER HDD LED, UID LEDs(per node)	POWER HDD LED, UID LEDs(per node)
	I/O Ports	1 x USB 2.0 ports(per node)	1 x USB 2.0 ports(per node)
Storage	External	4x 2.5" HDD/SSD per node (all SATA or 2x NVME* + 2 x SATA)	4x 2.5" HDD/SSD per node (all SATA or 2x NVME* + 2 x SATA)
System cooling	Fan	16 x 40*56 mm PWM Easy-Swap Fans	16 x 40*56 mm PWM Easy-Swap Fans
Power Supply	Capacity	2 (1+1), Redundant	2 (1+1), Redundant
	Output Watts	1600W	1600W
	Efficiency	Platinum	Platinum