

# 1U10E-ROME/2T



2666




1U/2U High Density Storage



10Gbase-T

10 Bay 2.5" NVMe/SATA HDD (6Gb/s)

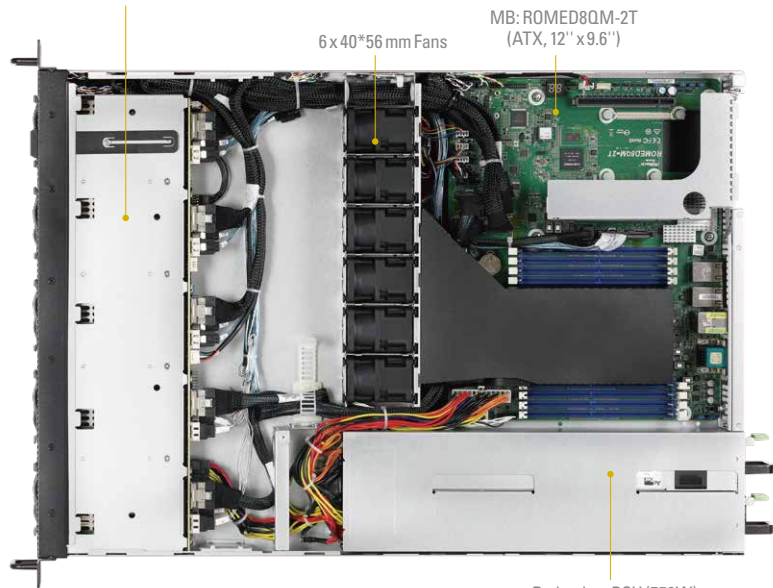

6 x 40\*56 mm Fans


MB: ROMED8QM-2T (ATX, 12" x 9.6")

Redundant PSU (750W)

## Application

- Data Center Server
- SMB and Database Processing & Storage

10 x 2.5" NVMe/SATA HDD

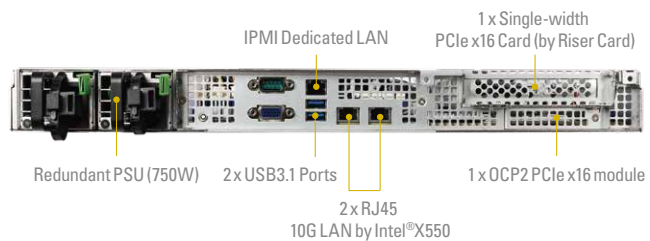

IPMI Dedicated LAN

1 x Single-width PCIe x16 Card (by Riser Card)

Redundant PSU (750W)

2 x USB 3.1 Ports

1 x OCP2 PCIe x16 module

2 x RJ45  
10G LAN by Intel® X550

## 1U10E-ROME/2T

System Physical Status	Form Factor	1U Rackmount
	Chassis Model	1U10E-ROME
	Chassis Dimension	625 x 482.6 x 44.4 mm
	Support MB Size	ATX, 12" x 9.6" (ROMED8QM-2T)
CPU	Single Socket SP3 (LGA4094) Supports AMD EPYC™ 7002/7001 Series Processors	
Memory	8 DIMM Slots, Supports Eight-Channel DDR4 2666/2400 R DIMM (Modules up to 64GB Supported), and LR DIMM (Modules up to 256GB Supported)	
External Drive Bay	Front	10 x 2.5" NVMe SSDs or 10x SATA3 6.0Gb/s
Front Panel	Buttons	Power Button, Reset Button
	LEDs	Power LED, LAN LED
	I/O Port	1 x USB 3.1 Gen 1 Port
Ethernet	Interface	10000/1000/100/10 Mbps
	LAN Controller	2 x RJ45 10GLAN by Intel® X550
		1 x RJ45 Dedicated IPMI LAN port
Power Supply	Capacity	2(1+1)
	Output Watts	750W, Platinum
System Cooling	Fan	6 x 40*56 mm Hot-Swap fans

General Purpose Storage