


# 2U4G-ROME/2T



3200



10Gbase-T

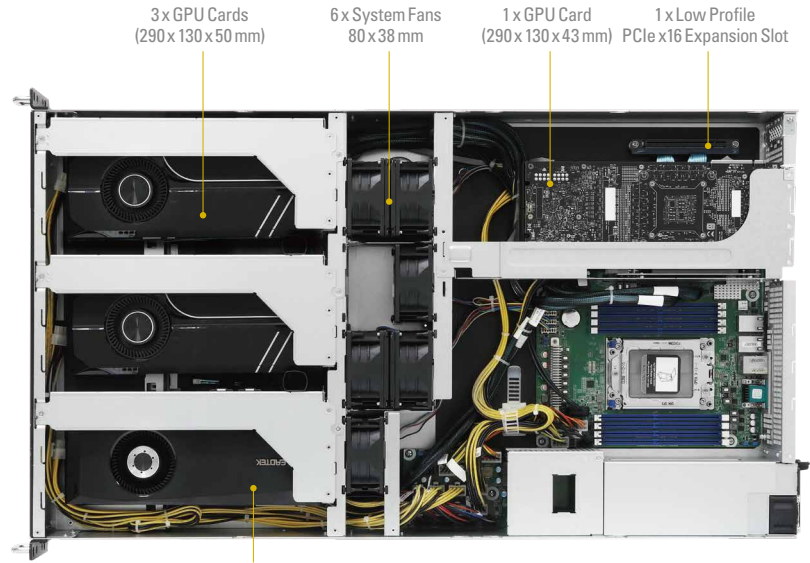

3 x GPU Cards  
(290 x 130 x 50 mm)

6 x System Fans  
80 x 38 mm

1 x GPU Card  
(290 x 130 x 43 mm)

1 x Low Profile  
PCIe x16 Expansion Slot

Sufficient Space Design to Install Multiple Graphics Cards  
has no Conflicts with PSUs

## Application

- Artificial Intelligence
- Machine Learning
- HPC
- Virtualization

Front Panel



NVMe Capable

4 \* 2.5" SATA (Default)



Redundant PSU  
(2000W)

2 x RJ45 10G LAN  
by Intel® X550

OCP2

Low Profile PCIe X16

## 2U4G-ROME/2T

<b>System Physical Status</b>	Form Factor	2U Rackmount
	Chassis Model	2U4G-ROME/2T
	Chassis Dimension	438 x 795 x 87.5 mm (without ear)
	Support MB Size	ATX, 12"x9.6"(ROMED8QM-2T)
<b>CPU</b>		Single Socket SP3(LGA4094) Supports AMD EPYC™ 7002/7001 Series Processors
<b>Memory</b>		8 DIMM Slots, Supports Eight-Channel DDR4 3200/2933 R DIMM (Modules up to 64GB Supported), and LR DIMM (Modules up to 256GB Supported)
<b>External Drive Bay</b>	Front	4 x 2.5" SATA 6GB/s HDDs (1 x SATA3 HDD could support NVMe or SATA3 6GB/s HDDs) + 1 x NVMe
<b>Front Panel</b>	Buttons	Power Button, UID Button
	LEDs	System LED, UID LED, Power LED, 2 x LAN LEDs (L1, L2 LED)
	I/O Port	2 x USB 2.0 Ports
<b>Ethernet</b>	Interface	10000/1000/100/10 Mbps
	LAN Controller	2 x RJ45 10GLAN by Intel® X550
		1 x RJ45 Dedicated IPMI LAN port
<b>Power Supply</b>	Capacity	2(1+1)
	Output Watts	2000W, Platinum
<b>System Cooling</b>	Fan	6 x 80*38mm System Fans