


# IMB-157

## Mini-ITX Motherboard

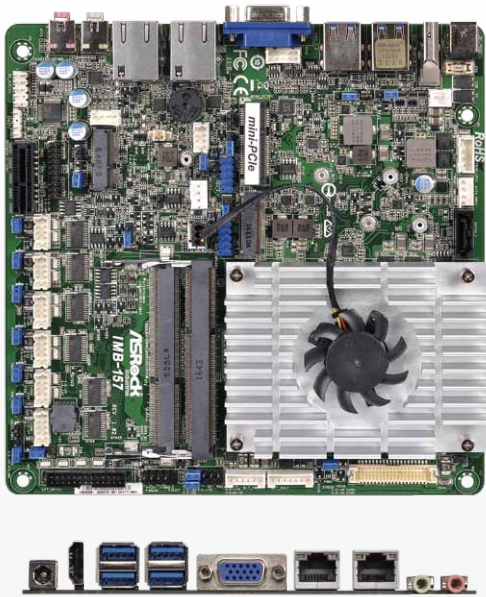

### Spotlight Features

- BGA1296 for Intel® Apollo Lake SoC
  - IMB-157D (N4200)
  - IMB-157L (N3350)
  - IMB-157M (E3940)
- Intel® HD Graphics
- Supports Dual Channel DDR3L 1867MHz, 2 x SO-DIMM, up to 16GB system memory
- 1 x VGA, 1 x HDMI, 1 x eDP or LVDS (Jumper Switch)
- 4 x USB 3.0, 4 x USB 2.0, 1 x SATA3
- 1 x Mini-PCIe, 1 x PCIe x1 Slot, 1 x M.2 (KEY E), 1 x M.2 (KEY M)
- Gigabit LAN : 2 x Realtek LAN
- 1 x TPM Header
- +12V or +19V~+24V DC-In (DC Jack / 4-pin ATX PWR Con)

### Specifications

Processor System	
Dimension	Mini-ITX (6.7-in x 6.7-in)
CPU	BGA1296 for Intel® Apollo Lake SoC
Core Number	(By CPU, Max 4)
Max Speed	(By CPU)
L2 Cache	(By CPU)
Chipset	N/A
BIOS	UEFI

Expansion Slot	
PCIe	1 x PCIe x1 slot
Mini PCIe	1 (full/half size) with PCIe x1 and USB 2.0 (Shared)
M.2	1 x M.2 (KEY M, 2242/2260) with SATA III signal for SSD 1 x M.2 (KEY E, 2230) with PCIe x1 and USB 2.0 (Shared) for Wireless
mSATA	0

Memory	
Technology	Dual Channel DDR3L 1867MHz
Max.	16GB
Socket	2 x SO-DIMM

Graphics	
Controller	Intel® HD Graphics
VRAM	Shared Memory
VGA	Supports max resolution up to 1920 x 1200
LVDS	Supports max resolution up to 1920 x 1200@60Hz
eDP	Supports max resolution up to 4096 x 2160@60Hz
HDMI	Supports max resolution up to 4096 x 2160@24Hz
DVI	No
DisplayPort	No
Multi Display	Yes (Triple Display)

Ethernet	
Interface	10/100/1000 Mbps
Controller	2 x Realtek RTL8111G
Connector	2 x RJ45

SATA	
Max Data Transfer Rate	SATA3 (6.0Gb/s)

Rear I/O	
VGA	1
DVI	0
HDMI	1
DisplayPort	0
Ethernet	2
USB	4 x USB 3.0
Audio	2 (Mic-in, Line-out)
Serial	0
PS/2	0

Internal Connector	
USB	4 x USB 2.0 (2 x 2.54 pitch header)
LVDS/inverter	1/1
eDP	1
VGA	1
Serial	6 x COM (COM1 and COM2 with RS232/422/485 support)
SATA	1
mPCIe	1
Parallel	1 (shared with GPIO)
mSATA	0
IrDA	0
GPIO	8 x GPI + 8 x GPO (shared with LPT header)
SATA PWR Output Con	1
Speaker Header	1

Watchdog Timer	
Output	From Super I/O to drag RESETCON#
Interval	256 segments, 0,1,2...255sec/min

Power Requirements	
Input PWR	+12V or +19V~+24V DC-In (DC Jack / 4-pin ATX PWR Con)
Power On	AT/ATX Supported AT : Directly PWR on as power input ready ATX : Press button to PWR on after power input ready

Environment	
Operating Temperature	0°C – 60°C